

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 253 721 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
30.10.2002 Bulletin 2002/44

(51) Int Cl.7: H04B 1/16, H04H 1/00

(21) Application number: 02396052.9

(22) Date of filing: 11.04.2002

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Tähtinen, Ilkka
20810 Turku (FI)

(74) Representative: Kupiainen, Juhani Kalervo
Berggren Oy Ab
P.O. Box 16
00101 Helsinki (FI)

(30) Priority: 11.04.2001 FI 20010760

(71) Applicant: Nokia Corporation
02150 Espoo (FI)

(54) Method for receiving a radio frequency (RF) receiver and RF receiver

(57) The invention relates generally to a method and an arrangement for receiving a radio frequency (RF) signal and an RF receiver. Particularly the invention relates to controlling and reducing power consumption in a radio receiver. The invention can advantageously be applied in receiving arrangements of radio systems, wherein information is transferred in bursts, such as a receiver of Digital Video Broadcasting (DVB) system.

According to the invention, during the time between two bursts the power supply is maintained in at least in some parts of the phase locked loop PLL (240), while one or several other parts (202, 204, 224, 225, 230, 262, 270) of the receiver are turned off for a certain time period between the two bursts. The present invention enables fast tuner lock-in time and still offers a considerable saving in total power consumption of the receiver.

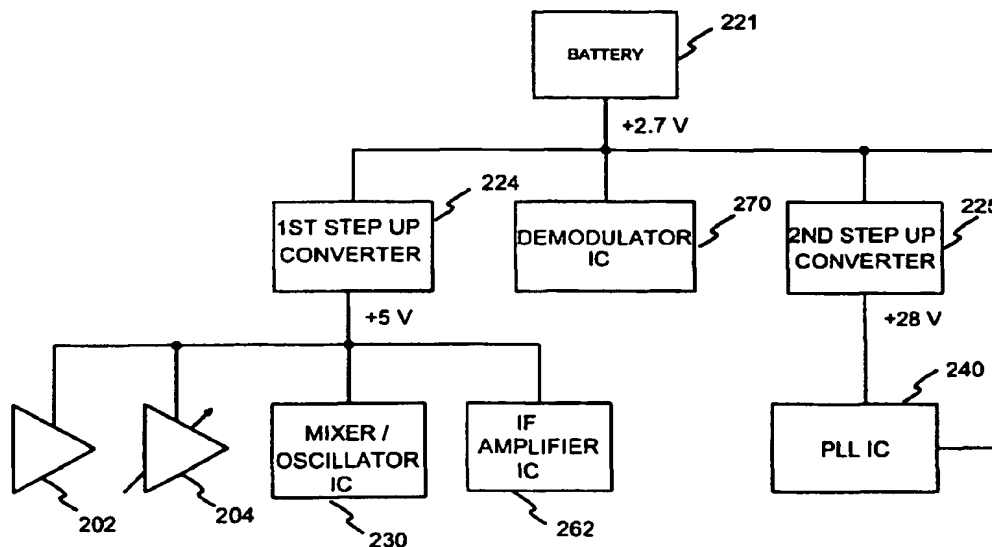


FIG. 3

EP 1 253 721 A2

Description

[0001] The invention relates generally to a method and an arrangement for receiving a radio frequency (RF) signal, and an RF receiver. Particularly the invention relates to controlling and reducing power consumption in a radio receiver.

[0002] In the following, DVB system and DVB receivers are described as examples, although the use of the invention is not restricted to the DVB system. Digital video broadcasting has been under development, and it is seen to gradually replace the analog broadcasting systems. This is because of its ability to offer new types of services and better quality of service. Digital Video Broadcasting has been under standardisation by European Broadcasting Union (EBU) and European Telecommunications Standards Institute (ETSI) that have created a DVB standard ETS 300 800. In the digital broadcasting system data is transferred in bursts within determined time slots. The modulation is e.g. Orthogonal Frequency Division Multiplex (OFDM) modulation.

[0003] With digital video broadcasting it is possible to achieve a good quality data transfer even if the receiver is mobile. Therefore the mobile applications of terrestrial DVB (DVB-T) will be important. However, the mobile DVB receivers should be small-sized and lightweight with small-sized batteries. Also, the available time of operation between charging the batteries should be long. In achieving this, the power consumption of mobile DVB receivers may become a problem.

[0004] A typical DVB receiver tuner comprises RF IC's (integrated circuits) and discrete RF blocks. Most of the tuner IC's are operated with +5 V power supply. If the power supply is provided by a low voltage battery (3.7 V), the supply voltage for RF parts must be generated using a voltage converter. While the transmission of data consists of bursts, it would be possible to turn off the receiver for the period of time between the bursts. This kind of solutions are described in patent documents US 5 878 336 and US 5 515 364. However, there are certain problems related with applying these solutions in a DVB receiver. Firstly, the period between two consecutive bursts may be short and the tuner cannot be switched off, during the transmission break.

[0005] A further problem is related to a certain type of step-up converter. Even if the converter is switched off, the output voltage of the converter does not drop down to zero. The remaining supply voltage appears also in the tuner power supply line and consumes power.

[0006] It is an objective of this invention to provide a receiving method and a receiver that offers solutions to the prior art problems. Especially, it is an object of this invention to provide a solution for reducing a power consumption of the receiver, and still to maintain stable receiving conditions.

[0007] The objectives of the invention are fulfilled by providing a procedure, in which parts of a receiver can be separately turned on/off. The invention is partly

based on a discovery that power consumption can be reduced by switching an RF block partially on/off. The power is maintained at least some parts of the phase locked loop, while the power is switched off from other parts of the receiver. This is because tuner recovery from power-down to ready-to-receive-data time is mainly originated by the PLL lock-in time. According to the embodied invention, during the time between two bursts the power supply is maintained in at least in some parts of the phase locked loop, while one or several other parts of the receiver are turned off. If there are no transmission breaks/bursts to be received for a longer period of time, then even the phase locked loop is advantageously turned off.

[0008] The invention can be implemented by, for example powering the phase locked loop directly from a low voltage battery (such as +3,7 V). Other RF parts of the tuner can be powered using step-up converter to generate tuner supply voltage (+5 V). Tuner supply voltage can be switched off during the periods between the bursts, keeping the phase locked loop powered. The demodulator may also be switched off during the period between the bursts by, for example, controlling an internal switch off function. Another voltage converter is needed for generating the high tuning voltage for the VCO (voltage controlled oscillator). Tuning voltage converter may also be switched off during the time between two bursts/transmission breaks. Both voltage converters can be controlled using a common control signal, if the settling time of the tuning voltage converter is adequate.

[0009] The present invention enables fast tuner lock-in time and still offers a considerable saving in total power consumption of the receiver.

[0010] In accordance with a first aspect of the invention, there is provided a method for receiving multi-carrier radio frequency signals that include modulated information, wherein the method comprises a step for maintaining a power of at least one part of a powered receiver while turning off the power from another receiver part depending on a state of a transmission.

[0011] In accordance with a second aspect of the invention, there is provided a method for receiving radio frequency signals that include modulated information, wherein the said radio frequency signals appear as bursts, and the method comprises the steps of producing a local frequency signal with an oscillator, controlling the frequency of said oscillator with a phase locked loop, mixing the input signal with the local frequency signal for producing an intermediate frequency signal, and demodulating the intermediate frequency signal for producing a data stream of said information, and supplying power for the receiver means providing said method steps, wherein during a period between receiving two consecutive bursts the method further comprises the step of supplying continuously power to the means providing the step of demodulation, and the step of turning off the supply power for a determined period of time from

a receiver part providing another of said steps for receiving.

[0012] In accordance with a third aspect of the invention, there is provided a receiver for receiving and processing multi-carrier radio frequency signals that include modulated information, wherein the receiver comprises means for keeping at least a part of the receiver powered depending on a state of a transmission, and a controller for turning off supply power from another receiver part for a determined time depending on a state of the transmission.

[0013] In accordance with a fourth aspect of the invention, there is provided a receiver for receiving and processing radio frequency signals that include modulated information, wherein the said radio frequency signals appear as bursts, the receiver comprising an oscillator for producing a local frequency signal, a phase locked loop for controlling the frequency of the local frequency signal, a mixer for mixing the input signal with the local frequency signal for producing an intermediate frequency signal, and a demodulator for producing a data stream of said information, and a power supply for supplying power for the receiver, wherein the receiver comprises means for keeping at least a part of the phase locked loop powered during a period between two consecutive bursts to be received, and means for turning off the supply power from another receiver part for determined time during said period between two consecutive bursts to be received.

[0014] Preferred embodiments of the invention are presented in dependent claims.

[0015] The term "phase locked loop" is often understood to include the controlled oscillator for producing the output signal. However, in this text, a "phase locked loop" is considered to include the control parts, and the controllable oscillator is not considered to be included in the term. This definition is due to the fact that the oscillator is advantageously located in an integrated circuit together with the mixer, while the control parts are located in a separate integrated circuit.

[0016] The term "burst" is often understood to comprise a discontinuous transmission. However, in the DVB or broadcast context the "burst" can be applied for continuous transmission with transmission breaks or breaks in data transmission both in the DVB transmission.

[0017] In the following, the invention is described in more detail by means of the attached drawings in which

Fig. 1 illustrates a flow diagram of an example for method according to the invention,

Fig. 2 illustrates an example of a receiver according to the invention,

Fig. 3 illustrates an example of a power supply arrangement of a receiver according to the present invention.

[0018] Figure 1 illustrates a flow diagram of an example for a method according to the invention. When there is a data transmission to be received, 101, all receiver parts are turned on, step 102. A burst is then received on step 103, and after receiving the burst the step-up converters and the demodulator are turned off, 105, 106. However, at least some parts of the phase locked loop remain powered. The next burst is then awaited, 107. Since the RF signal processing of the receiver is in off state, the receiver cannot monitor the appearance of the next burst, so the receiver must have the information on the time instant when the next burst is to be received. This information may, for example, be based on predetermined time intervals between the bursts. When the next burst is to be received, 107, the step-up converters and the demodulator are switched on, 108, 109, and the next burst is received, 103.

[0019] When there is no further data to be received, 104, all RF signal processing parts of the receiver may be turned off, 110. However, the receiver should then have information on when new data is to be received, 111. Alternatively the receiver may periodically switch on the tuner and check, whether there is new data to be received.

[0020] Figure 2 illustrates an example of a receiver according to the present invention. The RF signal is received from the radio interface with an antenna 201, and the received signal is amplified in a pre-amplifier 202. The signal is then filtered with a band-pass type tracking filter 203, and again amplified in a variable gain AGC (Automatic Gain Control) amplifier 204. After filtering with band-pass type tracking filters 205 and 206, the signal is led to a mixer 234. A voltage controlled oscillator 231 provides a local oscillator signal to the second input of the mixer. An intermediate frequency signal from the mixer output is amplified, 237, and filtered with selective SAW (Surface Acoustic Wave) band-pass filter 261. The filtered signal is amplified with an IF amplifier 262, which gives a feedback control signal for the AGC amplifier 204. The amplified IF signal is led to a demodulator 270 that demodulates the intermediate frequency signal into a transport bit stream corresponding to the information that has been modulated into the RF signal. The demodulator may include several functional blocks such as an Analog-to-Digital converter AD, a Fast Fourier Transformer FFT, Forward Error Correction unit FEC, a channel correlation unit CH. COR., a channel estimator CH. EST., an AGC unit, an interface for a I2C bus, and an output buffer for the transport stream TS OUT.

[0021] Next the function of a simplified synthesizer circuit according to Figure 2 is shortly explained. The synthesizer of the receiver comprises a PLL (Phase Locked Loop) 240, which controls the VCO (Voltage Controlled Oscillator) 231, the output signal of which is amplified by the amplifier 236 in order to generate the output signal for the PLL. The frequency of the signal provided by the oscillator 231 is divided in a dual modulus frequency divider comprising pre-scaler 242a and counters 242b.

The resulting signal is led to the phase comparator 243. Correspondingly, the signal generated by the reference oscillator 258 is amplified, 244, and the frequency of the reference oscillator, e.g. 10.16666 MHz, is divided down to comparison frequency 245, and further supplied to the second input of the phase comparator 243. The phase comparator outputs a signal which is proportional to the phase difference of said two input signals, whereby the output signal is supplied to a low pass filter 246, and the filtered signal will further control frequency of the voltage controlled oscillator 231. The described phase locked loop operates in a known way so that the output frequency of the synthesiser is locked to the frequency coming to the phase comparator from the reference frequency branch. The output frequency is controlled by setting a value for the divisor N. This control is made e.g. by the demodulator through an I2C control bus.

[0022] Low voltage battery 221 of e.g. 3,7 V, the voltage of which is converted to tuner supply voltage and VCO tuning voltage using two separate step-up converters. The first step-up converter 284 supplies e.g. (+5 V) supply voltage, and the second step-up converter supplies e.g. the (+28 V) tuning voltage. The step-up converters are turned on/off with "power switch" control signals 284 and 285, respectively. The power switch control signals are received, for example, from a controller unit 280. The control unit may also control the demodulator to on/off states with a further power switch signal 281, or through the I2C bus.

[0023] Figure 3 illustrates how the power supply is connected to different parts of the receiver that is illustrated in Figure 2. The low voltage IC 240 comprising the phase locked loop is connected directly to the battery power supply 221, as well as the voltage step-up converters 224 and 225 and the demodulator IC 270. Other RF IC's and RF blocks are connected to the tuner power supply. Tuner power supply voltage (+5 V) and tuning voltage (+28 V) are generated in step-up converters 224 and 225. During a data transmission break the step-up converters 224 and 225 and the demodulator IC 270 are switched down using a separate power down pin. All devices connected to the tuner power supply (+5 V) are therefore switched off. The IC for the phase locked loop being connected directly to the battery power supply 221 remains ready to lock-in, in the transmission channel frequency. The demodulator retains all the previously used parameters such as the code rate, constellation, guard interval and channel estimation during the data transmission break.

[0024] The two step-up converters can be controlled separately, either controlling the +5V step-up converter or both +5 V and +28 V step-up converters. The phase locked loop IC can also be turned down (if this feature supported) from power down switch (IC pin) or via I2c-bus (software) during a longer transmission break. Step-up converters can be controlled from a separate (power) controller or logic, shown in Figure 2. However, the pow-

er may alternatively be switched down using the demodulator I/O -port.

[0025] In one embodiment of the present invention the receiver includes a part, preferably an integrated circuit, which has an internal capability of switching off the IC if the supply power decreases below the supply voltage minimum value. The switch controlling the power can be implemented inside the IC itself. This way, even if the step-up converter provide a non-zero output voltage, the IC is switched off internally and does not consume power.

[0026] The construction of the control unit of the receiver is not described in a greater detail. In general, the functions in a telecommunication receiver are controlled by a controller including processing capacity in the form of microprocessor(s) and memory in the form of memory circuits. Such arrangements are known as such from the technology of the art. To convert a known telecommunication receiver into a telecommunication device according to the invention, it may be necessary in addition to the hardware changes described above, to store into the memory means a set of machine-readable instructions that instruct the microprocessor(s) of the receiver controller to perform the control operations described above. Composing and storing into memory of such instructions involves known technology which, when combined with the teachings of this patent application, is within the capabilities of a person skilled in the art.

[0027] Above, an example embodiment of the solution according to the invention has been described. The principle according to the invention can naturally be modified within the frame of the scope defined by the claims, for example, by modification of the details of the implementation and ranges of use.

[0028] Above, DVB-T receiver is used as an example. However, the present invention can naturally be applied, in receivers of any communications system where transmission is not continuous. One example of such a system is Digital Audio Broadcasting (DAB) and mobile telecommunications systems that use Time Division Multiple Access (TDMA) technology.

[0029] Above, some examples of values for parameters such as voltages are given. However, other alternative values depending on the circuit design can naturally be applied. Also some circuits, such as a synthesizer circuit, are given that are only to be regarded as illustrative examples.

50 Claims

1. A method for receiving multi-carrier radio frequency signals that include modulated information, characterised in that the method comprises a step for maintaining a power of at least one part of a powered receiver while turning off the power from another receiver part depending on a state of a transmission.

2. A method according to claim 1, further comprising the step of applying a power down pin for switching down at least one of a phase locked loop (240), a step up converter (224, 225) and a demodulator (270).

3. A method for receiving radio frequency signals that appear as bursts, the method comprising the steps of:

providing a local frequency signal with an oscillator (231),

controlling the frequency of the oscillator with a phase locked loop (240),

mixing (234) the input signal with the local frequency signal for producing an intermediate frequency signal,

demodulating (270) the intermediate frequency signal for producing a data stream of the information, and

supplying power (221-225) for the receiver means providing the method steps, **characterised in that** the method further comprises a step of

turning off the supply power for supplying continuously power to the means providing the step of demodulation, and

the step (105, 106) of turning off the supply power for a determined period of time from another receiver part provides another of said steps for receiving.

4. A method according to claim 3, **characterised in that** a low voltage power is received from a battery (221).

5. A method according to claim 4, **characterised in that** an operating power is lead to the phase locked loop (240) directly from said battery (221).

6. A method according to claim 4, **characterised in that** the voltage of said battery (221) is converted to a higher value with at least one step up converter (224, 225) and the supply power of said higher voltage value is used to give power to at least one of said receiver parts (202, 204, 230, 262).

7. A method according to claim 6, **characterised in that** the said conversion is turned off for a determined period of time between receiving two consecutive bursts (105).

8. A method according to claim 7, **characterised in that** the voltage of said battery (221) is converted to a second higher value with a step up converter (225) and the supply power of said higher voltage value is used for producing the output voltage of the phase locked loop (240), and said conversion is

turned off for a determined period of time between receiving two consecutive bursts (105).

9. A method according to claim 3, **characterised in that** a threshold value is determined for the voltage of supply power for at least one of the receiver parts, the voltage of the supply power is sensed in said at least one receiver part, and the operation of said receiver part is internally turned off when the value of said supply voltage is lower than said determined threshold value for the supply voltage.

10. A method according to claim 3, further comprising the step of applying a power down pin IC for turning down at least one of the phase locked loop (240), a step up converter (224, 225) and the demodulator (270).

11. A receiver for receiving and processing multi-carrier radio frequency signals that include modulated information, **characterised in that** the receiver comprises means (280) for keeping at least a part of the receiver powered depending on a state of a transmission, and a controller for turning off supply power from another receiver part for a determined time depending on a state of the transmission.

12. A receiver according to claim 11, further comprising a power down pin for switching down at least one of a phase locked loop (240), a step up converter (224, 225) and a demodulator (270).

13. A receiver for receiving radio frequency signals which appear as bursts, the receiver comprising:

an oscillator (231) for producing a local frequency signal,

a phase locked loop (240) for controlling the frequency of the local frequency signal,

a mixer (234) for mixing the input signal with the local frequency signal for producing an intermediate frequency signal,

a demodulator (270) for producing a data stream of said information, and

a power supply (221-225) for supplying power for the receiver, **characterised in that** the receiver further comprises

means (280) for keeping at least a part of the phase locked loop powered during a period between two consecutive bursts to be received, and

a controller for turning off the supply power from the another receiver part for determined time during the period between two consecutive bursts to be received.

14. A receiver according to claim 13, **characterised in that** said power supply comprises a battery (221)

for providing low voltage power.

15. A receiver according to claim 14, characterised in that the battery (221) is arranged to supply power directly to the phase locked loop (240). 5
16. A receiver according to claim 14, characterised in that the battery (221) is arranged to supply power directly to the demodulator (270). 10
17. A receiver according to claim 14, characterised in that the power supply comprises at least one step up converter (224, 225) for providing power of higher voltage from the low voltage power of the battery. 15
18. A receiver according to claim 17, characterised in that a first step up converter (224) is arranged to provide power for at least one of following receiver parts, an input amplifier (202, 204), the mixer (234, 237), and the oscillator (231, 236). 20
19. A receiver according to claim 18, characterised in that the receiver comprises means (280) for turning off the first step-up converter for a determined time during said period between two consecutive bursts to be received. 25
20. A receiver according to claim 17, characterised in that a second step up converter (225) is arranged to provide power for the phase locked loop (240) for producing the control signal for the oscillator (231). 30
21. A receiver according to claim 20, characterised in that the receiver comprises means (280, 285) for turning off said second step-up converter (225) for a determined time during said period between two consecutive bursts to be received. 35
22. A receiver according to claim 13, characterised in that the oscillator (231) is a voltage controlled oscillator. 40
23. A receiver according to claim 13, characterised in that the receiver comprises means (280, 281) for turning off the demodulator for a determined time during the period between two consecutive bursts to be received. 45
24. A receiver according to claim 13, characterised in that at least one of the receiver parts comprises means for sensing a voltage of its supply power, and means for turning off the operation of the receiver part when the value of the supply voltage is lower than a determined threshold value for the supply voltage. 50
55
25. A receiver according to claim 13, characterised in that the receiver further comprises a power down

pin IC for turning down at least one of the phase locked loop (240), a step up converter (224, 225) and the demodulator (270).

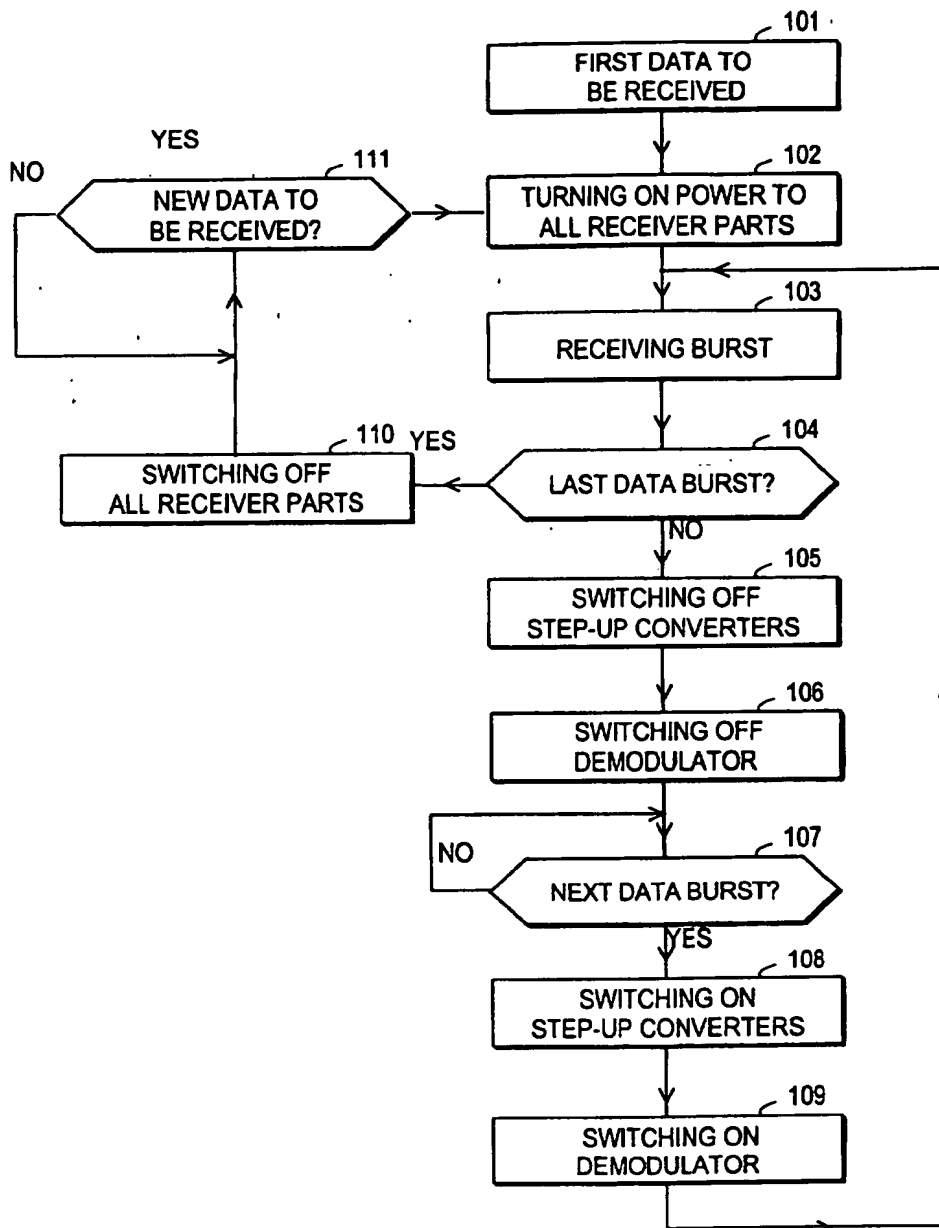


Fig. 1

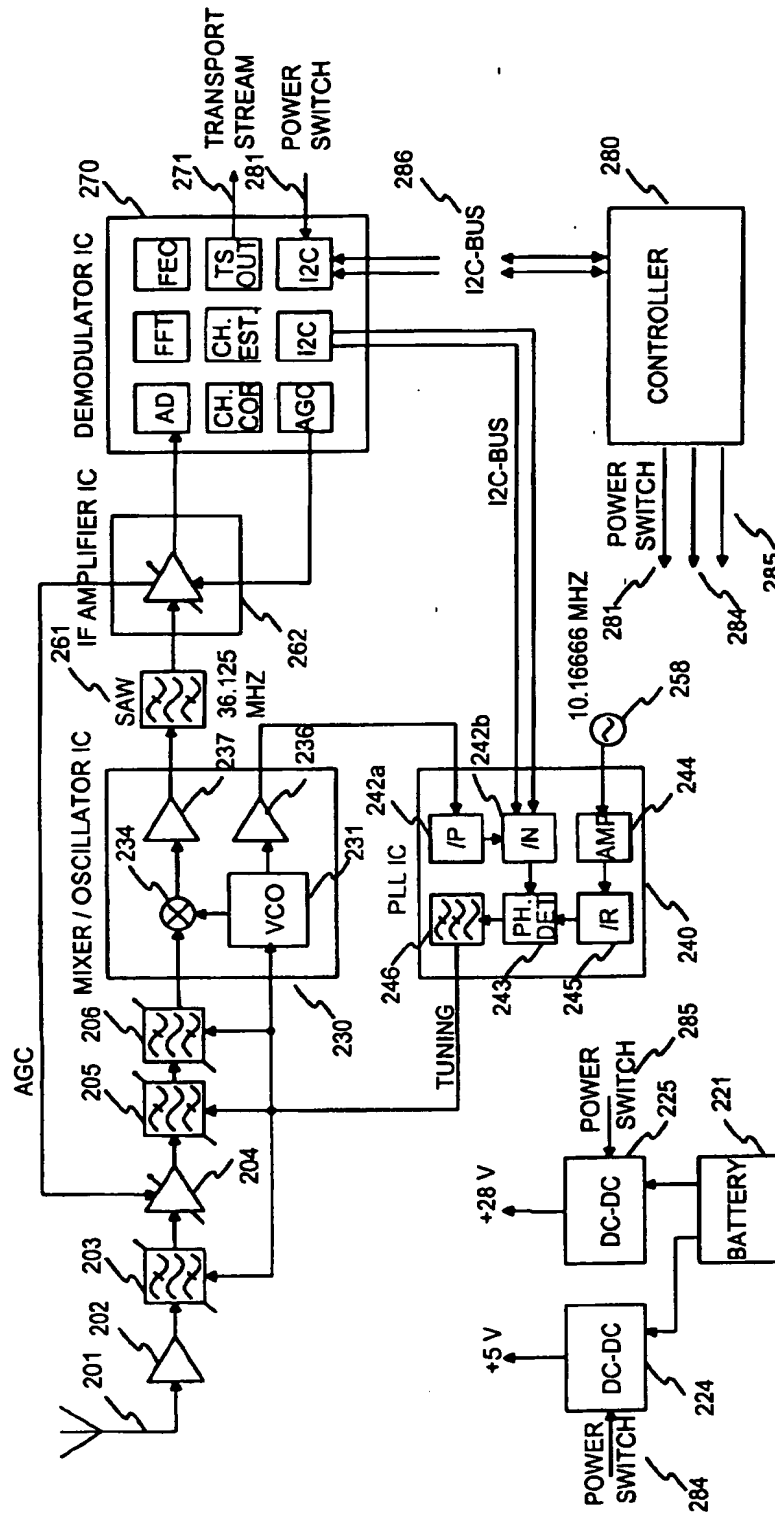


FIG. 2


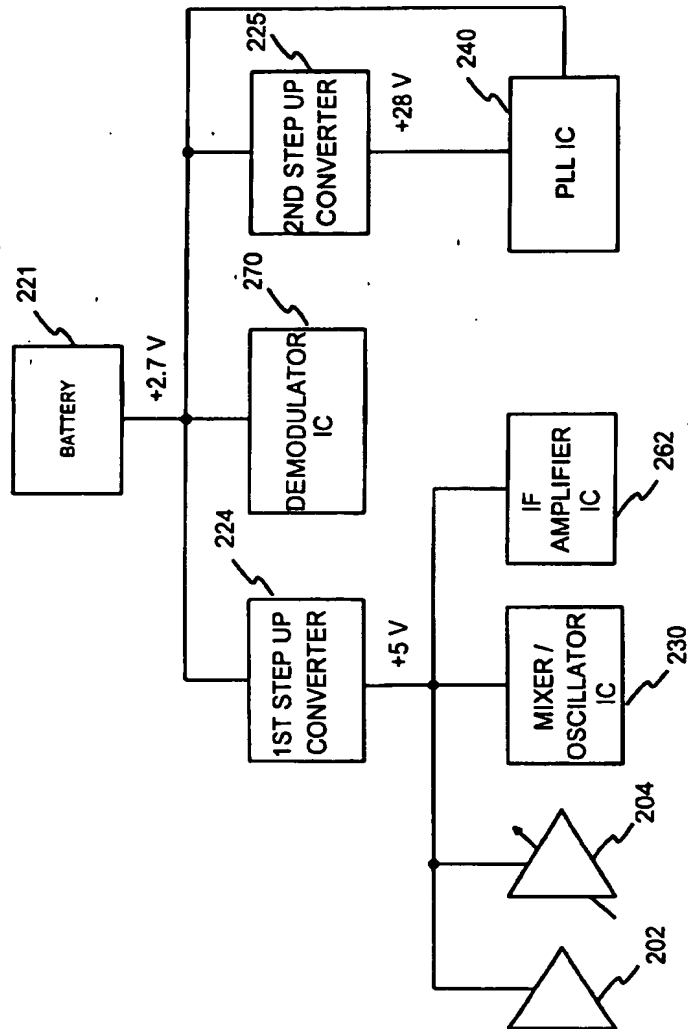


FIG. 3



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 253 721 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
17.12.2003 Bulletin 2003/51

(51) Int Cl.7: H04B 1/16, H04H 1/00

(43) Date of publication A2:
30.10.2002 Bulletin 2002/44

(21) Application number: 02396052.9

(22) Date of filing: 11.04.2002

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Tähtinen, Ilkka
20810 Turku (FI)

(74) Representative: Kupiainen, Juhani Kalervo
Berggren Oy Ab
P.O. Box 16
00101 Helsinki (FI)

(30) Priority: 11.04.2001 FI 20010760

(71) Applicant: Nokia Corporation
02150 Espoo (FI)

(54) Method for receiving a radio frequency (RF) signal and RF receiver

(57) The invention relates generally to a method and an arrangement for receiving a radio frequency (RF) signal and an RF receiver. Particularly the invention relates to controlling and reducing power consumption in a radio receiver. The invention can advantageously be applied in receiving arrangements of radio systems, wherein information is transferred in bursts, such as a receiver of Digital Video Broadcasting (DVB) system.

According to the invention, during the time between two bursts the power supply is maintained in at least in some parts of the phase locked loop PLL (240), while one or several other parts (202, 204, 224, 225, 230, 262, 270) of the receiver are turned off for a certain time period between the two bursts. The present invention enables fast tuner lock-in time and still offers a considerable saving in total power consumption of the receiver.

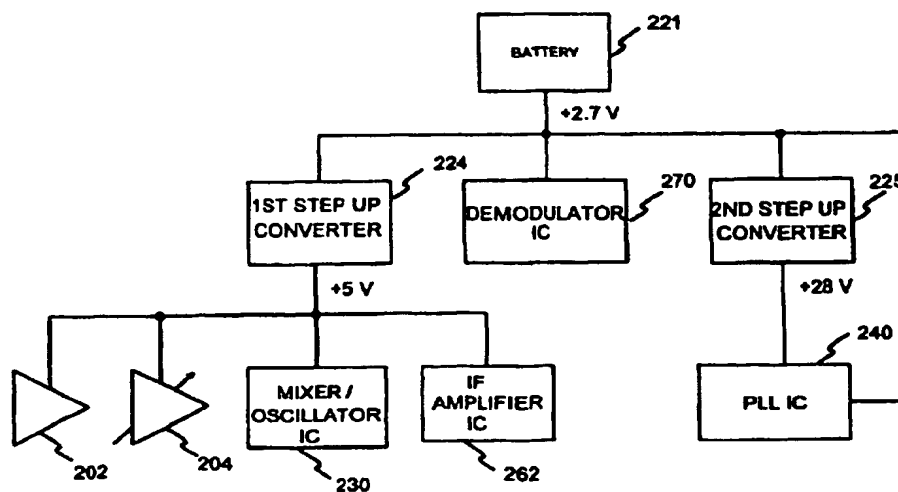


FIG. 3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 39 6052

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 96 03811 A (INTERDIGITAL TECH CORP) 8 February 1996 (1996-02-08)	1,3,11	H04B1/16 H04H1/00
Y	* page 3, line 21 - line 23 * * page 7, line 36 - page 8, line 11 * * page 9, line 30 - line 38 * * page 10, line 20 - line 27 * * page 15, line 33 - line 37 * * page 23, line 11 - line 17 * * claim 1 * * figure 1A * * figure 2 *	13	
X	EP 0 939 495 A (MOTOROLA SEMICONDUCTEURS) 1 September 1999 (1999-09-01) * column 1, line 41 - line 43 * * column 1, line 55 - column 2, line 1 * * column 5, line 15 - line 27 *	1,11	
Y	US 5 521 947 A (MADSEN BENNY) 28 May 1996 (1996-05-28) * column 3, line 37 - line 42 *	13	
A	EP 0 829 967 A (TOKYO SHIBAURA ELECTRIC CO) 18 March 1998 (1998-03-18) * column 2, line 47 - column 3, line 6 * * column 3, line 20 - line 36 * * figure 2 *	1-25	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04B H04H
A,D	US 5 878 336 A (CASHEN DENNIS JOE ET AL) 2 March 1999 (1999-03-02) * claim 1 * * figure 3 *	1-25	
A	EP 0 891 046 A (MATSUSHITA ELECTRIC IND CO LTD) 13 January 1999 (1999-01-13) * figure 1 * * abstract *	1-25	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 6 October 2003	Examiner Avilés Martínez, L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 (01.02.99) (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 39 6052

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 606 739 A (GOTO HIROYUKI) 25 February 1997 (1997-02-25) * abstract * * figure 2 * -----	1-25	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 6 October 2003	Examiner Avilés Martínez, L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 (03.92) (P04.01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 39 6052

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-10-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9603811	A	08-02-1996	AT 225097 T	15-10-2002
			AT 225098 T	15-10-2002
			AU 3130595 A	22-02-1996
			DE 1096692 T1	20-09-2001
			DE 69528369 D1	31-10-2002
			DE 69528369 T2	22-05-2003
			DE 69528398 D1	31-10-2002
			DE 69528398 T2	22-05-2003
			DK 1096692 T3	27-01-2003
			DK 775388 T3	27-01-2003
			EP 1079530 A2	28-02-2001
			EP 1083664 A2	14-03-2001
			EP 1083665 A2	14-03-2001
			EP 1096692 A1	02-05-2001
			EP 1079592 A2	28-02-2001
			EP 1320249 A2	18-06-2003
			EP 0775388 A1	28-05-1997
			ES 2182751 T3	16-03-2003
			ES 2182910 T3	16-03-2003
			FI 971731 A	23-04-1997
			JP 3130049 B2	31-01-2001
			JP 9511882 T	25-11-1997
			JP 2001119338 A	27-04-2001
			PT 1096692 T	31-01-2003
			PT 775388 T	28-02-2003
			WO 9603811 A1	08-02-1996
			US 5666355 A	09-09-1997
			US 6243399 B1	05-06-2001
EP 0939495	A	01-09-1999	EP 0939495 A1	01-09-1999
US 5521947	A	28-05-1996	EP 0688446 A1	27-12-1995
			EP 0731569 A2	11-09-1996
			JP 8507667 T	13-08-1996
			WO 9420888 A2	15-09-1994
			US 5471187 A	28-11-1995
			US 5515364 A	07-05-1996
			US 5453714 A	26-09-1995
EP 0829967	A	18-03-1998	JP 3433019 B2	04-08-2003
			JP 10093495 A	10-04-1998
			EP 0829967 A2	18-03-1998
			US 5999830 A	07-12-1999
US 5878336	A	02-03-1999	NONE	

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 39 6052

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-10-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0891046	A	13-01-1999	JP 3272273 B2	08-04-2002
			JP 11027203 A	29-01-1999
			CN 1204901 A ,B	13-01-1999
			EP 0891046 A2	13-01-1999
			US 6359870 B1	19-03-2002

US 5606739	A	25-02-1997	JP 3193111 B2	30-07-2001
			JP 5183488 A	23-07-1993

EPO FORM P0159

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.